


Data & Figures


SPECIFICATIONS

MODEL*	MIN./MAX. WORKING PRESSURE PSIG (KGF/CM ²)	ELECTRICAL	VALVE TYPE	ORIFICE SIZE IN (MM)	CONN. NPT / BSP	DIMENSIONS IN (MM)			WEIGHT LB (KG)
						H	W	D	
AED21	5/175 (.35/12.3)	115/1/60 or 230/1/50	Direct Acting	.625 (16)	¼"	5.13 (130)	2.25 (57)	7.88 (200)	3 (1)
AED22	5/175 (.35/12.3)		Direct Acting	.625 (16)	⅜"	5.13 (130)	2.25 (57)	7.88 (200)	4 (2)
AED23	5/175 (.35/12.3)	115-60/100-50 or 230-60/200-50 NEMA 4/4x	Internal Pilot Operated Diaphragm	.625 (16)	½"	5.13 (130)	2.25 (57)	7.88 (200)	4 (2)
AED30	5/200 (.35/14)			.625 (16)	½"	5.13 (130)	2.25 (57)	7.88 (200)	4 (2)
AED32	5/300 (.35/21)		Direct Acting	.625 (16)	½"	5.56 (141)	2.25 (57)	7.88 (200)	3 (1)
AED41	5/1500 (.35/105)		.047 (1.20)	¼"	4.38 (111)	1.69 (43)	4.88 (124)	2 (1)	
AED50	5/300 (.35/21)		External Pilot Operated Diaphragm	.50 (13)	½"	5.31 (135)	2.00 (51)	5.00 (127)	2 (1)
AED52	5/300 (.35/21)	.50 (13)		½"	6.25 (159)	2.00 (51)	7.00 (178)	3 (1)	

*Maximum Operating Temperature is 120°F (49°C)

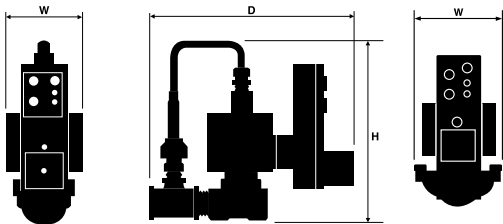

AED 21, 22, 23, 30, 32, 41



AED 50 & 52